


Breakout Patch Cord

Features:

- Low insertion loss
- High repeatability and high stability
- Ease of installation
- Meets GR326 or IEC 61300-2 standards

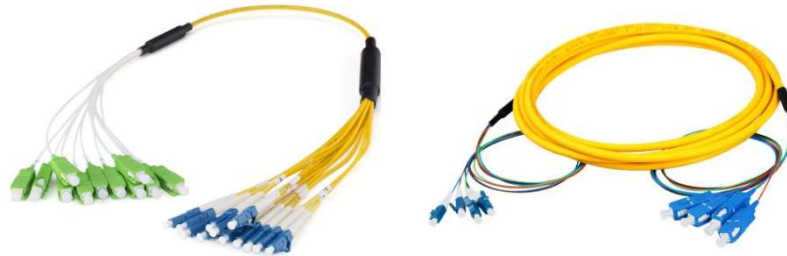

Specification:

Items	Random Mating according to IEC 61300-3-34						Against Master Connector according to IEC 61300-3-4	
	Grade A		Grade B		Grade C		Average	Max
	Average	Max (97%)	Average	Max (97%)	Average	Max (97%)		
Insertion Loss	≤0.08dB	≤0.15dB	≤0.12dB	≤0.25dB	≤0.25dB	≤0.5dB	≤0.25dB	≤0.30dB
Return Loss	≥50dB(PC), ≥50dB(UPC); ≥60dB(APC)						≥30dB(PC)	
Durability	500times							
Operation temperature	-40℃ ~ +85℃							
Fiber Type	OS1/OS2						OM1/OM2/OM3/OM4/OM5	

12 Cores fan-out Patch Cord Mechanical Drawing

