

## SC internal shutter simplex Adapter

### Features:

- Low insertion loss
- Dust and laser proof
- Ferrule end face not touch shut High repeatability and high stability
- Multiple styles PC/APC and Various color available
- IEC 61754-4 and GR-326-Core complaint
- RoHS/REACH and UL94-V0 inflammability complaint

Forming method	Flange	Dust cap	Color
 Welded type	 With	 Notched flat cap	 Green
 One piece	 Without	 T-shaped gourd cap	 Aqua  Beige  Blue


## SC internal shutter simplex Adapter

### Specification:

Items	Insertion Loss	Mechanical resistance	Repeatability	Operating Temperature
SM/PC	≤0.2dB	200-600g	< 0.2dB(500times)	-40°C ~ +85°C
SM/APC	≤0.2dB	200-600g	< 0.2dB(500times)	-40°C ~ +85°C
MM/PC	≤0.2dB	200-600g	< 0.2dB(500times)	-40°C ~ +85°C



## SC internal shutter simplex with flange and without flange Mechanical Drawing

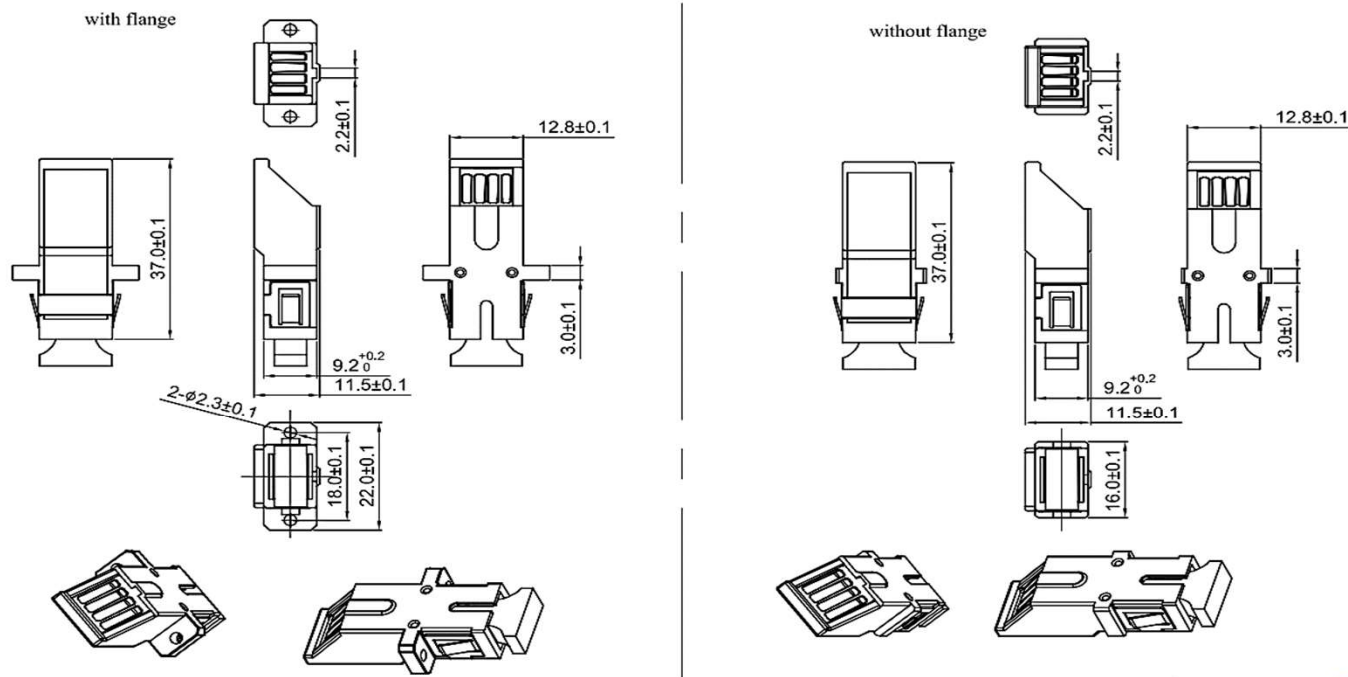

Unit: mm